





Built-in BMS Protection



Overcharge
protection



Overdischarge
protection




Overcurrent
protection



Short circuit
protection



Cell voltage
self balance

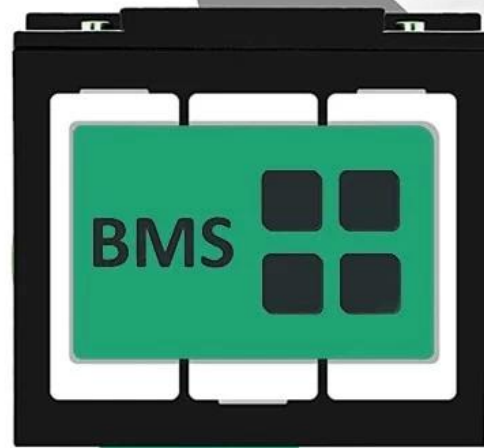

BMS PROTECTION

BUILT-SMART BMS



Overcharge
Protection



Over discharge
Protection



Short Circuit
Protection



High/Low
Temp Protection




Overcurrent
Protection



Equalizing
Voltage

BMS

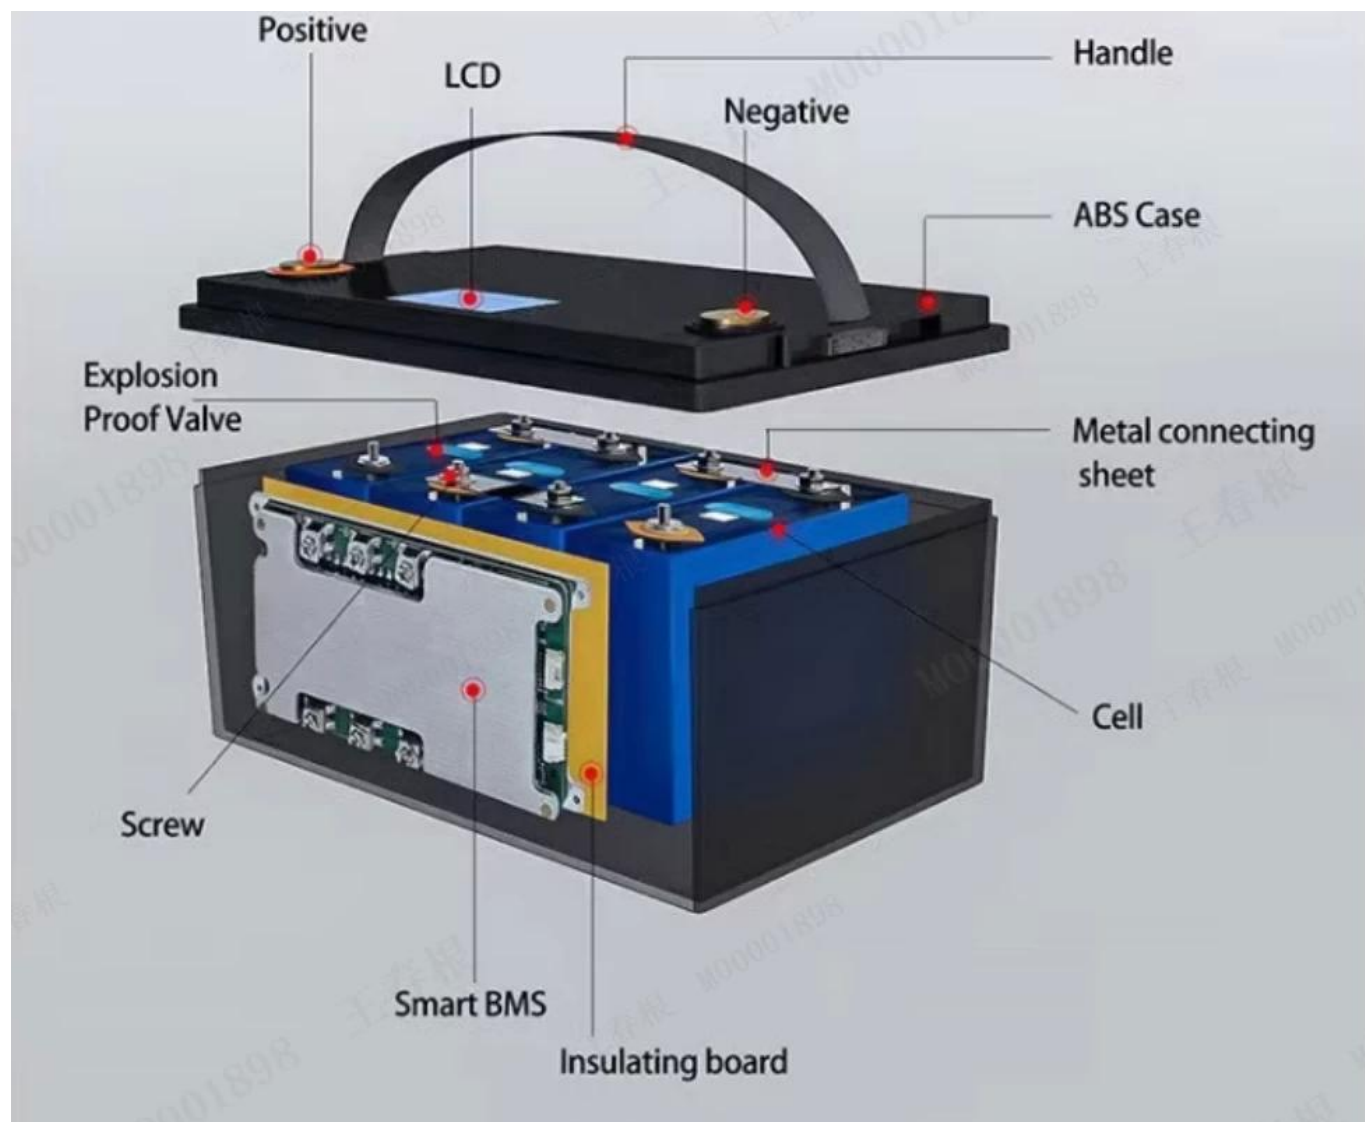

PACKAGING & SHIPPING





Home energy storage



Home energy storage



Agricultural energy storage



PV/Solar panels



Outdoor/RV electricity



Yacht/Boat electricity



Industrial energy storage



Communication base station



Utility grid/Ups systems/

We provide one-stop purchasing service

We (Qishou) provide one-line one-to-one guidance



Qishou Qishou Qishou Qishou Qishou

	Qishou	Qishou	Qishou
--	--------	--------	--------

基本仕様	動作電圧範囲	25.6 V	8S
	動作電流範囲	200 mA	0.5 A以内
	動作温度範囲	29.2 V	動作 3.65 V以内
	動作電圧範囲	20 V	動作電圧範囲 2.5 V以内
	動作電流範囲	200 mA	200-動作電圧範囲
	動作電圧範囲	200 mA	動作電圧範囲
	動作電流範囲	200 mA	動作電圧範囲
	動作電圧範囲	≥25mΩ	
動作電圧範囲	動作電圧範囲	29.2 V	動作電圧範囲
	動作電圧範囲	20 V	動作電圧範囲
	動作電圧範囲	200 mA	動作電圧範囲
	動作電圧範囲	動作電圧範囲	動作電圧範囲
	動作電圧範囲	-25 ~ 動作電圧範囲	動作電圧範囲
	動作電圧範囲	動作電圧範囲 70	動作電圧範囲
動作電圧範囲	動作電圧範囲	-10 ~ 動作電圧範囲	
	動作電圧範囲	動作電圧範囲 60	
	動作電圧範囲	-20 ~ 動作電圧範囲	
	動作電圧範囲	動作電圧範囲 55	
	動作電圧範囲	95%	
動作電圧範囲	動作電圧範囲	70 - 動作電圧範囲	
	動作電圧範囲	動作電圧範囲 106	
	動作電圧範囲	39 V	動作電圧範囲
	動作電圧範囲	40.5±0.3% V	動作電圧範囲
動作電圧範囲	動作電圧範囲	522 × 268 × 221 ± 3 mm	動作電圧範囲
	動作電圧範囲	594 × 340 × 297 ± 3 mm	動作電圧範囲
	動作電圧範囲		
	動作電圧範囲		