

Vida útil más larga: Nuestra batería lifepo4 de 24 V y 100 AH para sistema fotovoltaico de almacenamiento de energía en el hogar utiliza celdas A, la batería ofrece 2560 Wh y puede soportar hasta 6000 ciclos (6000 ciclos a 80 % DOD).

Protección BMS: Nuestra batería LifePO4 de 200 Ah protege contra los problemas más comunes que causan fallas en la batería, como sobrecarga, sobredescarga, sobrecorriente, cortocircuito y alta temperatura. También ha obtenido las certificaciones SDS/UN38.3/CE, garantizando su calidad y seguridad.

Conéctese para obtener mayor capacidad: La batería LiFePO4 de 24 V y 200 Ah se puede conectar en paralelo y en serie para mayor capacidad. Permite extenderse hasta 2S o 16P.

Usar: Se usa ampliamente para sistemas de almacenamiento en el hogar (evitando los efectos de cortes de energía), sistemas fuera de la red, vehículos recreativos, motores de pesca con curricán, botes, barcos, remolques y actividades al aire libre.





6000 Cycle Life

Deep Cycle Rechargeable LiFePO4 Battery Pack

MEGMEET

25.6V 100Ah



**LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:

DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
Charge with specified charge according to charging requirement

    **RoHS**
MADE IN CHINA



6000 Cycle Li
Deep Cycle Rechargeable LiFePO4

25.6V 100

Cautions:
DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to
DO NOT Use battery in the strong electrostatic and
Charge with specified charge according to charging

6000 Cycle Life

Deep Cycle Rechargeable LiFePO4 Battery Pack

MEGMEET

25.6V 100Ah



**LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:

DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
Charge with specified charge according to charging requirement

CE RoHS
MADE IN CHINA

6000 Cycle Life

Deep Cycle Rechargeable LiFePO4 Battery Pack

MEGMEET

48V 100Ah



**LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:

DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
Charge with specified charge according to charging requirement

CE RoHS
MADE IN CHINA

Built-in BMS Protection



Overcharge
protection



Overdischarge
protection




Overcurrent
protection



Short circuit
protection



Cell voltage
self balance

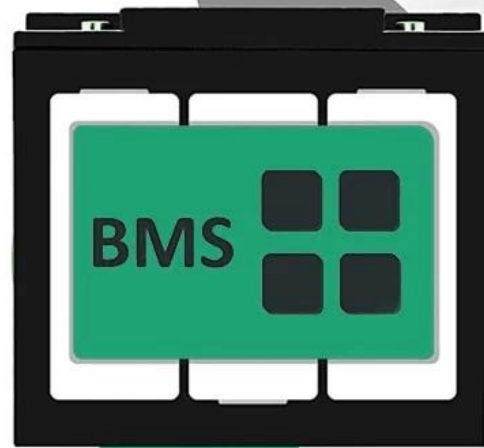

BMS PROTECTION

BUILT-SMART BMS



Overcharge
Protection



Over discharge
Protection



Short Circuit
Protection



High/Low
Temp Protection




Overcurrent
Protection



Equalizing
Voltage

BMS

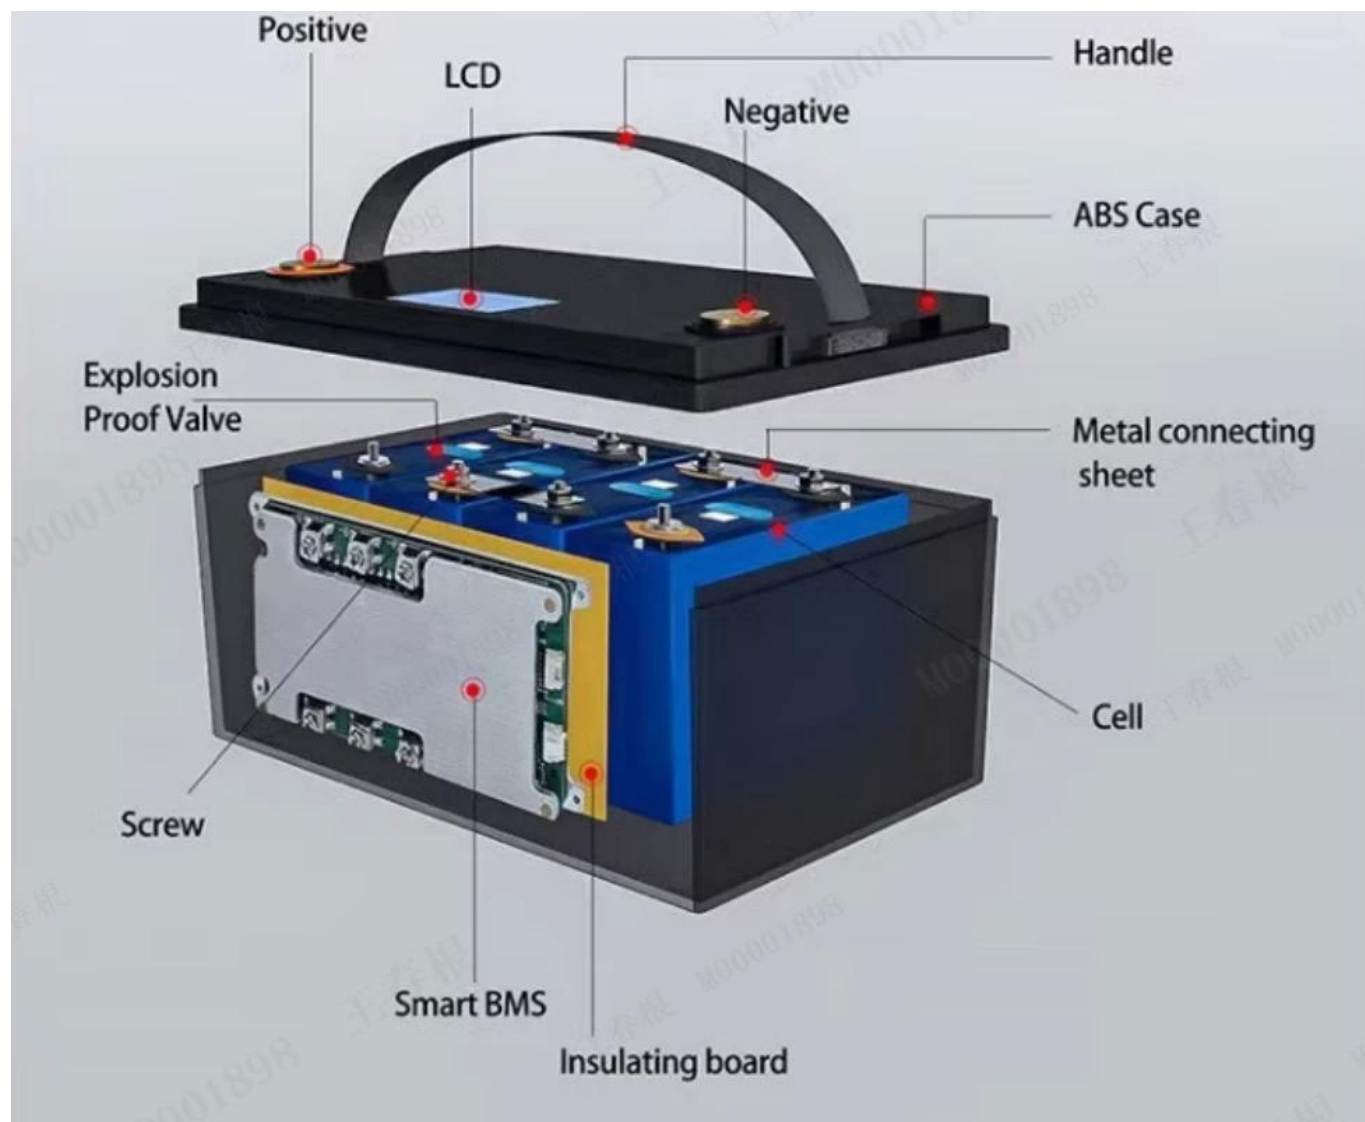

PACKAGING & SHIPPING





Home energy storage



Home energy storage



Agricultural energy storage



PV/Solar panels



Outdoor/RV electricity



Yacht/Boat electricity



Industrial energy storage



Communication base station



Utility grid/Ups systems/

We provide one-stop purchasing service

We (Qishou) provide one-line one-to-one guidance



Producto Técnico Parámetros de especificación

Elementos	Parámetros	Anotado
-----------	------------	---------

Actuación	Voltaje de la batería	25,6 V	8S
	Capacidad de la batería	100Ah	0,5°C
	Voltaje de corte de carga	29,2 V	Celda única 3,65 V.
	Descarga del voltaje de corte	20V	Celda única ajustable de 2,5 V
	Corriente de carga	100A	Corriente máxima-200A
	Descarga de corriente	100A	Corriente de trabajo continua
	Resistencia interna	≤25mΩ	
Protecciones	Protección contra sobrecarga de voltaje	29.2.V	Configurable
	Protección contra sobredescarga de voltaje	20V	Configurable
	Protección contra sobrecorriente de carga	100A	Configurable
	Protección contra cortocircuitos	SÍ	Retire la carga o la carga se puede levantar
	Protección de temperatura BMS	-25 °C ~ 70 °C	Protección de la electricidad y la temperatura ambiente.
Usar Ambiente	Temperatura de trabajo	-10 °C ~ 60 °C	
	Temperatura de almacenamiento y envío	-20 °C ~ 55 °C	
	Humedad relativa	95%	
	Presión atmosférica	70kPa-106kPa	
Dimensiones	Peso	19 kilos	Peso neto
	Peso	21±0,3% kilos	Peso bruto
	Tamaño	522x238x222±3mm	Tamaño del producto
	Tamaño	595x312x297±3mm	tamaño de embalaje