

0000 000 6000 00 00 0000 000000 0 000 000 0000 000000 0000 000 0000 :0000 0000 0 00000 000 000
 00000 lifepo4 000 0000 00 0000 000000 000000 000000000000 00000 0000 00 A 00000 0000 00 0000000
 80@ .0000 6000).000 0000 00 0000 6000 00 00000 00 0 000 00 000000 00 0000 000 25600 DOD).







6000 Cycle Life
Deep Cycle Rechargeable LiFePo4 Battery Pack

12.8V 200Ah

**LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:
DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
DO NOT Use battery in the strong vibration and shaking
Charge with specified charge according to charging requirement

CE RoHS
MADE IN CHINA

Built-in BMS Protection



Overcharge
protection



Overdischarge
protection




Overcurrent
protection



Short circuit
protection



Cell voltage
self balance

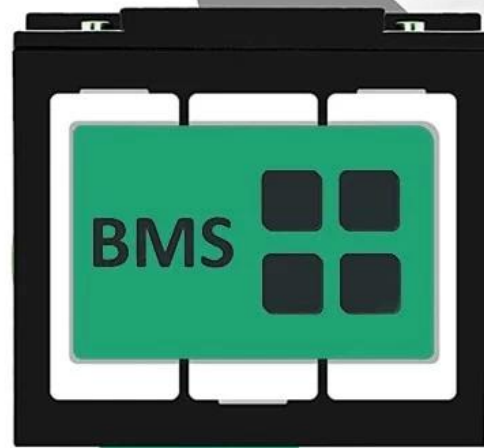

BMS PROTECTION

BUILT-SMART BMS



Overcharge
Protection



Over discharge
Protection



Short Circuit
Protection



High/Low
Temp Protection




Overcurrent
Protection



Equalizing
Voltage

BMS

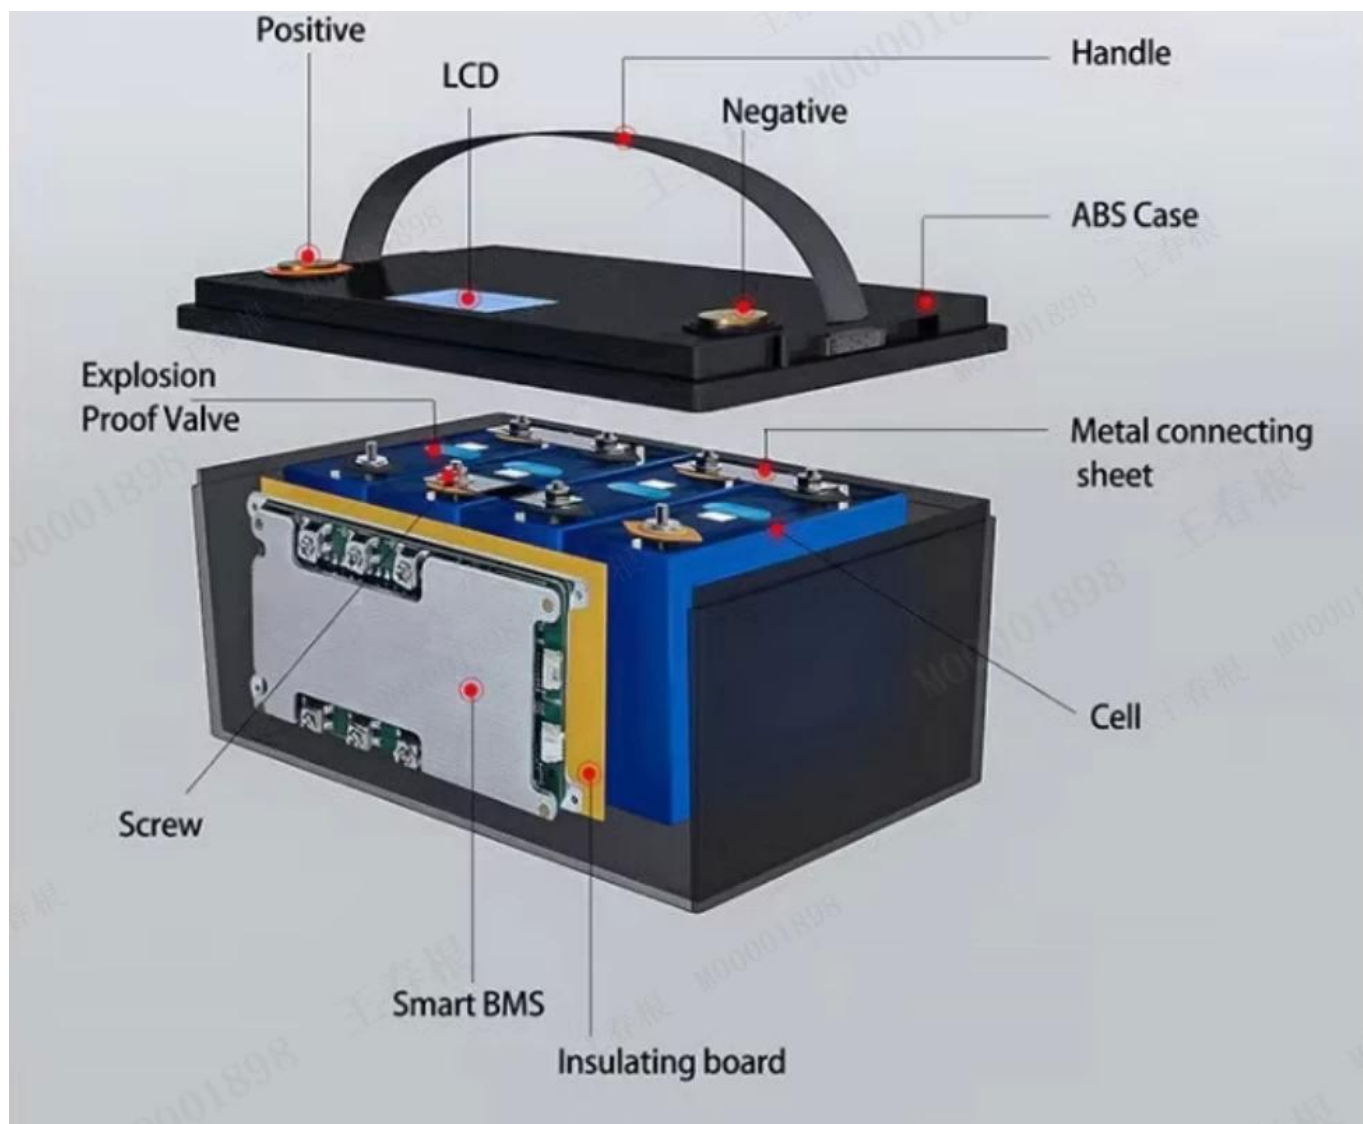

PACKAGING & SHIPPING





Home energy storage



Home energy storage



Agricultural energy storage



PV/Solar panels



Outdoor/RV electricity



Yacht/Boat electricity



Industrial energy storage



Communication base station



Utility grid/Ups systems/

We provide one-stop purchasing service

We (Qishou) provide one-line one-to-one guidance



Qishou Energy Storage Technology Co., Ltd.

	Qishou Energy Storage Technology Co., Ltd.	Qishou Energy Storage Technology Co., Ltd.	Qishou Energy Storage Technology Co., Ltd.
--	--	--	--

電 池 部	電 池 電 圧	12.8 V	4S
	電 池 電 流	200Ah	0.5 C 充 電 電 流
	電 池 電 阻	14.6 mΩ	電 池 3.65 V 電 圧
	電 池 電 圧 電 流	10 A	電 池 電 流 電 圧 2.5 V 電 流
	電 池 電 流	200A	200-電 流 電 流
	電 池 電 流	200A	電 池 電 流 電 流
	電 池 電 流	≤25mΩ	
電 池 電 流	電 池 電 流 電 流 電 流 電 流 電 流 電 流	14.6 V	電 池 電 流
	電 池 電 流 電 流 電 流 電 流 電 流	10 V	電 池 電 流
	電 池 電 流 電 流 電 流 電 流	200A	電 池 電 流
	電 池 電 流 電 流 電 流	電 流	電 池 電 流 電 流 電 流 電 流 電 流 電 流
	電 池 電 流 BMS	-25°C~70°C	電 池 電 流 電 流 電 流 電 流
電 池 電 流 電 流 電 流	電 池 電 流	-10°C~60°C	
	電 池 電 流 電 流 電 流 電 流 電 流	-20°C~55°C	
	電 池 電 流	95%	
	電 池 電 流 電 流	70kPa-106kPa	
電 池 電 流	電 池	19 V 電 流	電 池 電 流
	電 池	21±0.3 V 電 流	電 池 電 流
	電 池 電 流	522x238x222±3mm	電 池 電 流
	電 池 電 流	595x312x297±3mm	電 池 電 流 電 流 電 流 電 流