



Built-in BMS Protection



Overcharge
protection



Overdischarge
protection




Overcurrent
protection



Short circuit
protection



Cell voltage
self balance

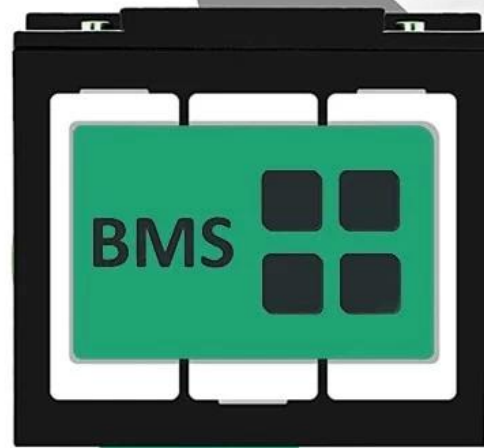

BMS PROTECTION

BUILT-SMART BMS



Overcharge
Protection



Over discharge
Protection



Short Circuit
Protection



High/Low
Temp Protection




Overcurrent
Protection



Equalizing
Voltage

BMS

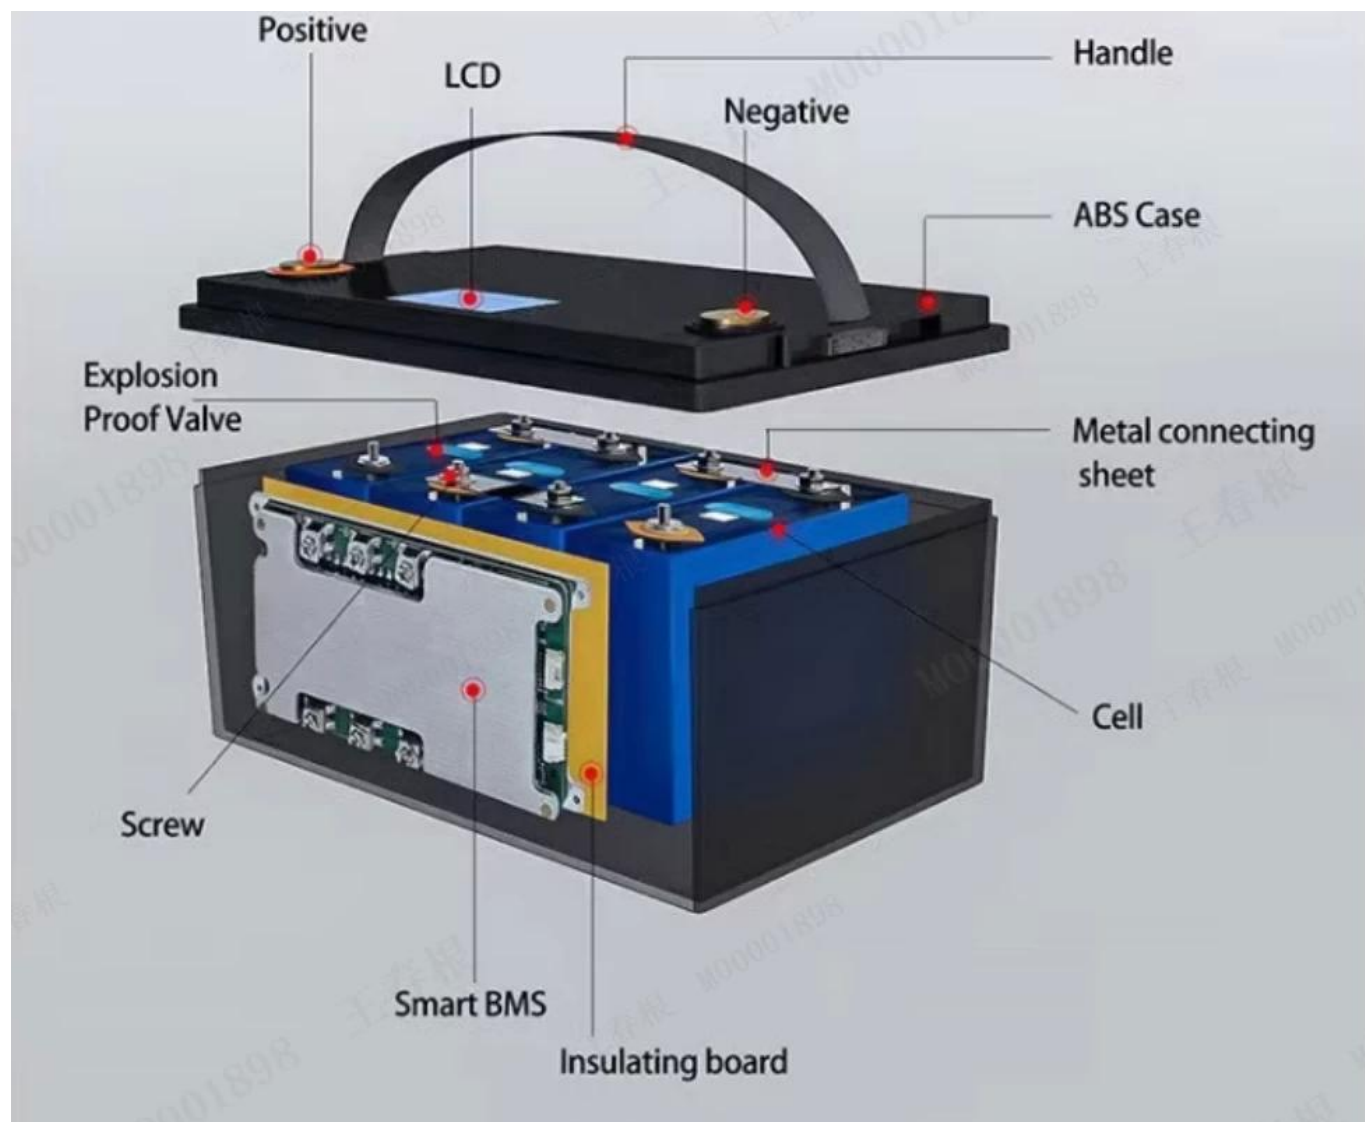

PACKAGING & SHIPPING





Home energy storage



Home energy storage



Agricultural energy storage



PV/Solar panels



Outdoor/RV electricity



Yacht/Boat electricity



Industrial energy storage



Communication base station



Utility grid/Ups systems/

We provide one-stop purchasing service

We (Qishou) provide one-line one-to-one guidance



QSO QSO QSO QSO

	QSO	QSO	QSO
--	-----	-----	-----

電圧電流	充電電圧	25.6V	8S
	充電電流	200Ah	0.5C
	充電電圧 満充電時	29.2V	3.65 電圧 1セルV
	充電電圧 満充電時	20V	2.5 電圧 1セルV-1セル電圧
	充電電流	200A	200-電流 1セルA
	充電電流	200A	充電電流 1セルA
	充電電流 充電電圧	≤25mΩ	
電圧電流	充電電圧 満充電時	29.2V	充電電圧 1セル
	充電電圧 満充電時	20V	充電電圧 1セル
	充電電流 満充電時	200A	充電電流 1セル
	充電電流 満充電時	充電電流	充電電流 1セル 充電電流 1セル
	BMS 充電電圧 満充電時	-25°C ~ 70°C	充電電圧 満充電時 充電電圧 満充電時
充電電圧 満充電時	充電電圧 満充電時	-10°C ~ 60°C	
	充電電圧 満充電時	-20°C~55°C	
	充電電圧 満充電時	95%	
	充電電圧 満充電時	70kPa-106kPa	
充電電圧	充電電圧	39 電圧	充電電圧
	充電電圧	40.5±0.3% 電圧	充電電圧 満充電時
	充電電圧	522x268x221±3 電圧	充電電圧 満充電時
	充電電圧	594x340x297±3 電圧	充電電圧 満充電時 充電電圧 満充電時