

Dłuższa żywotność: nasza bateria lifepo4 24 V 100Ah lifepo4 do domowego systemu fotowoltaicznego magazynowania energii wykorzystuje ogniwa A, bateria dostarcza 2560 Wh i może wytrzymać do 6000 cykli. (6000 cykli przy 80% DOD).

Ochrona BMS: Nasza bateria 200Ah LifePO4 eliminuje najczęstsze problemy powodujące awarie baterii, takie jak przeładowanie, nadmierne rozładowanie, nadmierne natężenie prądu, zwarcie i wysoka temperatura. Uzyskał także certyfikaty SDS/UN38.3/CE, zapewniające jego jakość i bezpieczeństwo.

Połącz, aby uzyskać większą pojemność: Akumulator LiFePO4 24 V 200 Ah można łączyć równolegle i szeregowo w celu uzyskania większej pojemności. Możliwość rozszerzenia do 2S lub 16P.

Używać: Może być szeroko stosowany w domowych systemach przechowywania (unikających skutków przerw w dostawie prądu), systemach poza siecią, pojazdach kempingowych, silnikach do trolingu, łodziach, pojazdach morskich, przyczepach i zajęciach na świeżym powietrzu.





6000 Cycle Life

Deep Cycle Rechargeable LiFePO4 Battery Pack

MEGMEET

25.6V 100Ah  **LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:

DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
Charge with specified charge according to charging requirement

    **RoHS**
MADE IN CHINA



6000 Cycle Li
Deep Cycle Rechargeable LiFePO4

25.6V 100

Cautions:
DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to
DO NOT Use battery in the strong electrostatic and
Charge with specified charge according to charging

6000 Cycle Life

Deep Cycle Rechargeable LiFePO4 Battery Pack

MEGMEET

25.6V 100Ah



**LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:

DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
Charge with specified charge according to charging requirement

RoHS
MADE IN CHINA

6000 Cycle Life

Deep Cycle Rechargeable LiFePO4 Battery Pack

MEGMEET

48V 100Ah



**LITHIUM IRON
PHOSPHATE BATTERY**

Cautions:

DO NOT Short circuit
DO NOT Reverse connections from charger to battery
DO NOT Disassemble
DO NOT Heat above 70°C
DO NOT Immerse the battery in water or allow it to get wet
DO NOT Use battery in the strong electrostatic and magnetic field
Charge with specified charge according to charging requirement

RoHS
MADE IN CHINA

Built-in BMS Protection



Overcharge
protection



Overdischarge
protection




Overcurrent
protection



Short circuit
protection



Cell voltage
self balance

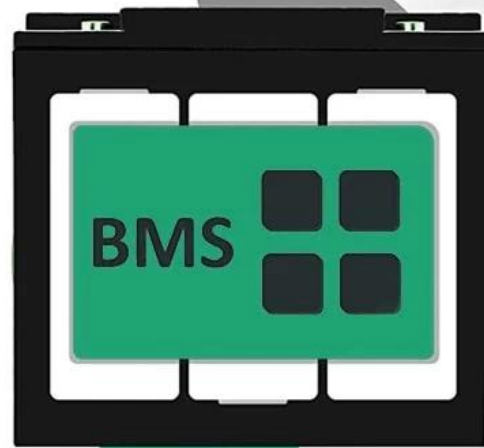

BMS PROTECTION

BUILT-SMART BMS



Overcharge
Protection



Over discharge
Protection



Short Circuit
Protection



High/Low
Temp Protection




Overcurrent
Protection



Equalizing
Voltage

BMS

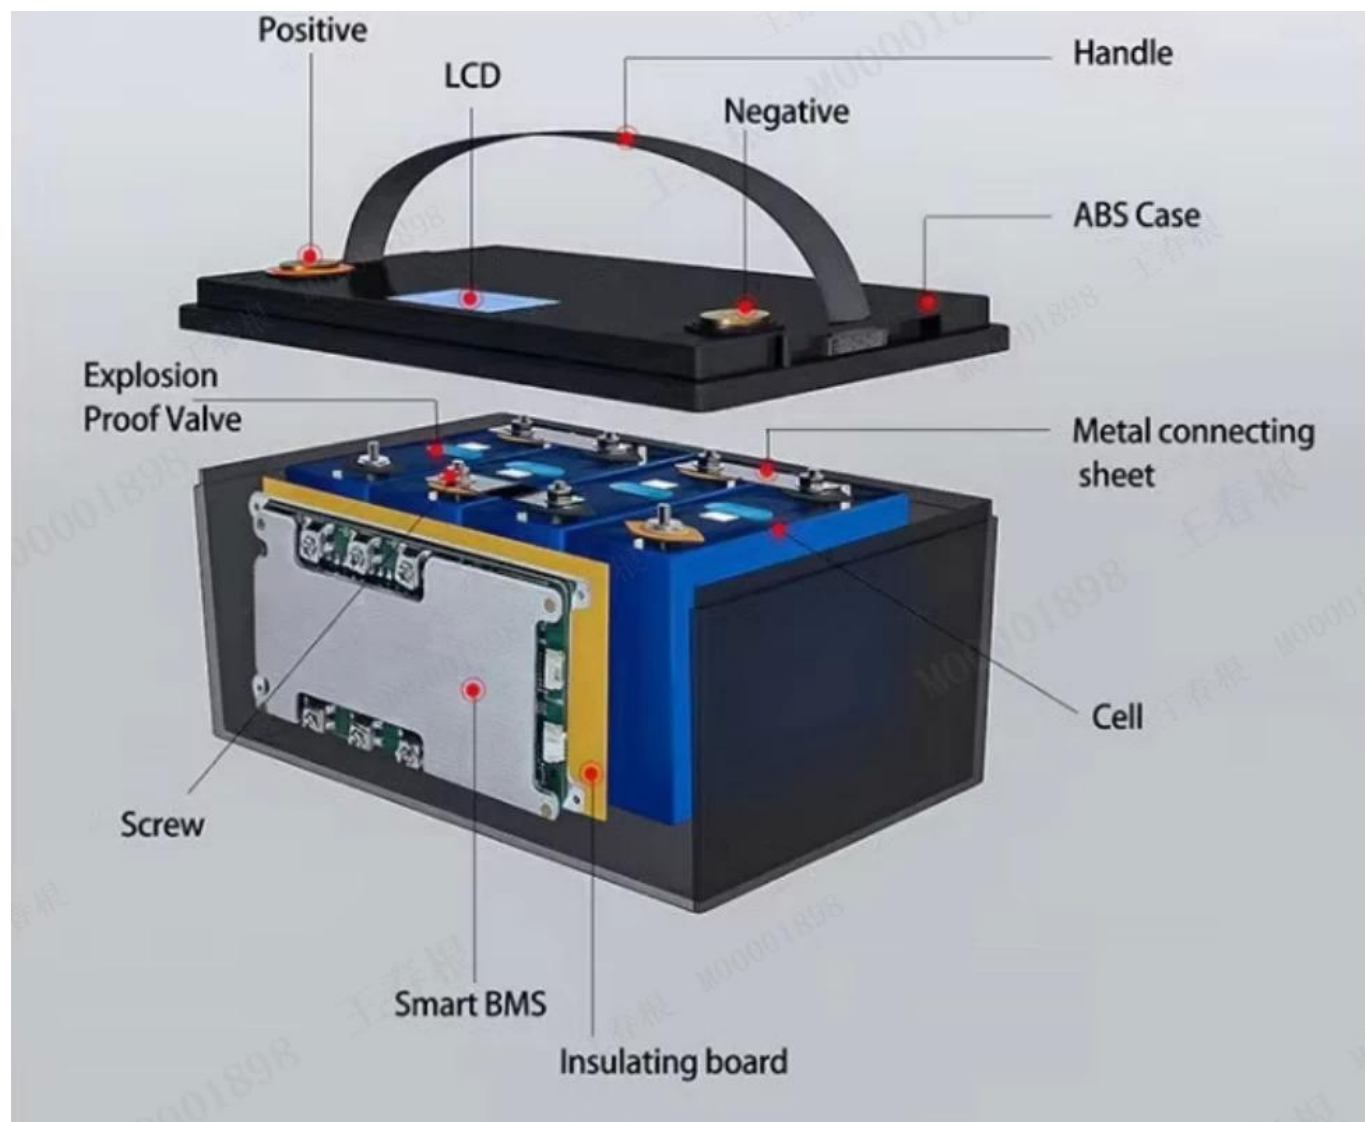

PACKAGING & SHIPPING





Home energy storage



Home energy storage



Agricultural energy storage



PV/Solar panels



Outdoor/RV electricity



Yacht/Boat electricity



Industrial energy storage



Communication base station



Utility grid/Ups systems/

We provide one-stop purchasing service

We (Qishou) provide one-line one-to-one guidance



Produkt Techniczny Parametry specyfikacji

	Rzeczy	Parametry	Znakomity
--	--------	-----------	-----------

Wydajność	Napięcie akumulatora	25,6 V	8S
	Pojemność baterii	100Ah	0,5°C
	Napięcie odcięcia ładowania	29,2 V	Pojedyncze ogniwo 3,65 V
	Napięcie odcięcia rozładowania	20 V	Pojedyncze ogniwo 2,5 V z regulacją
	Prąd ładowania	100A	Maksymalny prąd-200A
	Prąd rozładowania	100A	Ciągły prąd roboczy
	Opór wewnętrzny	≤25mΩ	
Zabezpieczenia	Zabezpieczenie przed nadmiernym napięciem ładowania	29.2.V	Możliwość ustawienia
	Zabezpieczenie przed nadmiernym rozładowaniem	20 V	Możliwość ustawienia
	Zabezpieczenie nadprądowe ładowania	100A	Możliwość ustawienia
	Zabezpieczenie przed zwarcie	TAK	Usuń ładunek lub można podnieść ładunek
	Ochrona temperaturowa BMS	-25 °C ~ 70 °C	Ochrona przed prądem elektrycznym i temperaturą otoczenia
Używać Środowisko	Temperatura pracy	-10 °C ~ 60 °C	
	Temperatura przechowywania i transportu	-20 °C ~ 55 °C	
	Wilgotność względna	95%	
	Ciśnienie atmosferyczne	70 kPa-106 kPa	
Wymiary	Waga	19 kg	Waga netto
	Waga	21 ± 0,3% kg	Waga brutto
	Rozmiar	522 x 238 x 222 ± 3 mm	Rozmiar produktu
	Rozmiar	595 x 312 x 297 ± 3 mm	rozmiar opakowania