**Longer Lifetime:** our lifepo4 battery for home energy storage photovoltaic system used A+ cells, the battery delivers 2560Wh and can endure up to 6000 cycles.(6000 cycles @80% DOD).

**BMS Protection:** Our 200Ah LifePO4 battery from the most common issues causing of battery failures, such as overcharge, over-discharge, over-current, short circuit and high temperature. It also has obtained SDS/UN38.3/CE certifications, ensuring its quality and safety.

**Connect for Larger Capacity:** 12V LiFePO4 battery 200Ah could connect in parallel & in series for larger capacity. Allow being extended up to 4S or 16P.


**Use:** It be widely used for home storage system (avoiding the effects of power outages), off-grid system, RV, Trolling Motor, Boat, Marine, trailer, and outdoor activities.









## **Built-in BMS Protection**

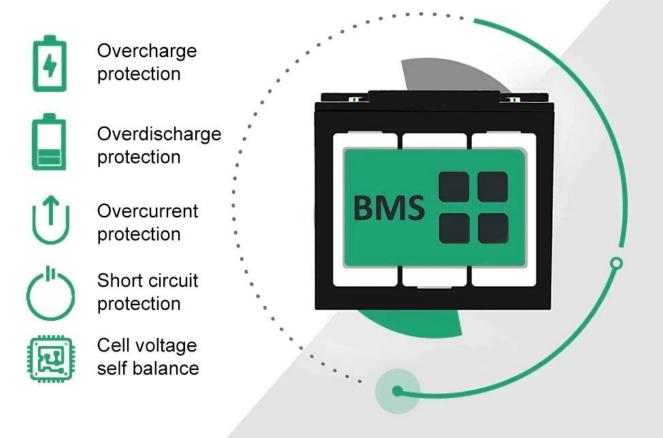

## **BMS** PROTECTION

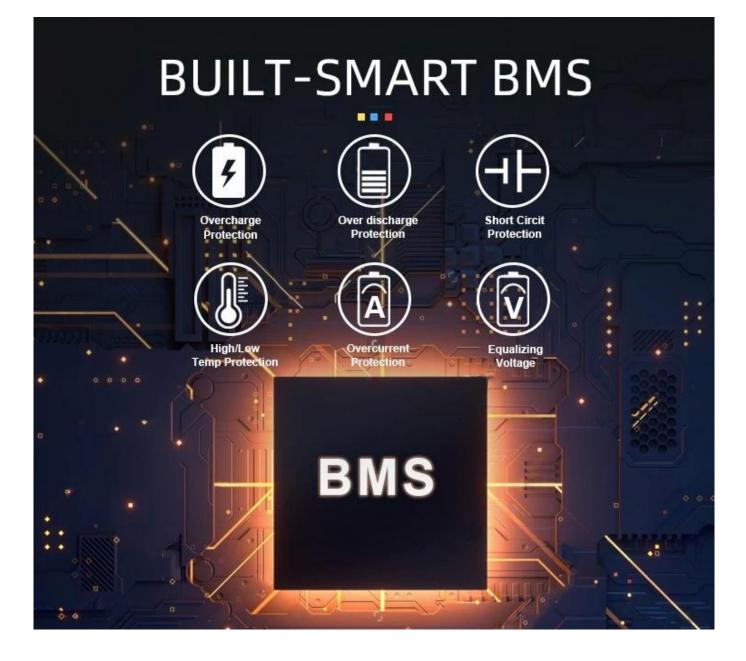

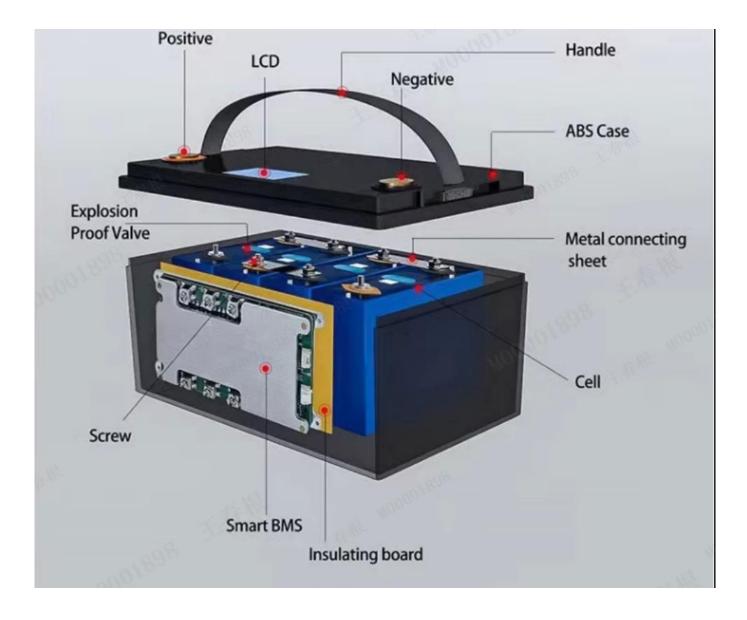

## **PACKAGING & SHIPPING**





















Home energy storage



Home energy storage



Agricultural energy storage



PV/Solar panels



Outdoor/RV electricity



Yacht/Boat electricity





Industrial energy storage Communication base station



Utility grid/Ups systems/

## We provide one-stop purchasing service We (Qishou) provide one-line one-to-one guidance



**Product Technical Specification Parameters** 

	Items	Parameters	Noted
	Battery Voltage	12.8V	4S
	Battery Capacity	200Ah	0.5C
	Charging Cut-Off Voltage	14.6V	Single Cell 3.65V
	Discharging Cut-Off Voltage	10V	Single Cell 2.5V-Adjustable
	Charging Current	200A	Maximum Current-200A
Performance Protections	Discharging Current	200A	Continuous Working Current
	Internal Resistance	≤25mΩ	
	Over -Charging Voltage Protection	14.6V	Settable
	Over-Discharging Voltage Protection	10V	Settable
	Charging Over-Current Protection	200A	Settable
	Short Circuit Protection	YES	Remove load or charging can be lifted
	BMS Temperature Protection	-25°C~70°C	Electricity and ambient temperature protection
Use Environment	Working Temperature	-10°C~60°C	
	Storage And Shipping Temperature	-20°C~55°C	
	Relative Humidity	95%	
	Atmospheric Pressure	70kPa-106kPa	
	Weight	19Kg	Net weight
	Weight	21±0.3% Kg	Gross Weight
Dimensions	Size	522x238x222±3mm	Product Size
	Size	595x312x297±3mm	Out packing size